

SD/HD/3G-SDI Multi-Format Monitors / Sunlight Readable Monitors


LVM-074W/SRM-074W-N

Multi Format



제품 규격

- Main Body : 203 x 131 x 34.6 (mm) / 8 x 5.16 x 1.36 (inch)
- With stand : 240 x 143 x 69 (mm) / 9.44 x 5.63 x 2.72 (inch)
- Weight : 0.94kg / 2.07lbs

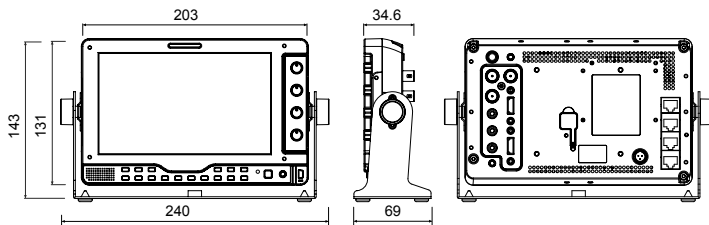

LCD

	LVM-074W	SRM-074W-N
Size	7"	7"
Resolution	1024 x 600 (16 : 9)	1024 x 600 (16 : 9)
Pixel Pitch	0.15mm	0.15mm
Color Depth	16.7M	16.7M
Viewing Angle (Typ.)	170°(H) / 170°(V)	160°(H) / 160°(V)
Luminance (Max.)	400cd/m ²	1,500cd/m ²
Contrast Ratio	800:1	800:1
Display Area	154(H) x 90(V) mm	154(H) x 90(V) mm

가장 폭넓은 기능을 제공하는 7인치 HD LCD 모니터

LVM-074W/SRM-074W-N은 1024x600의 고 해상도의 7인치 모니터입니다. LED 백라이트를 사용하였으며 매우 가볍고(본체 약 600g) 견고한 마그네슘 케이스를 채용하였습니다. 이 이상적인 7인치 모니터는 모니터 전면의 컨트롤 노브(knob)와 Headphone, USB 단자 배치로 간편한 사용감을 제공합니다. 또한, 170°의 넓은 시야각과 다양한 영상소스 대응(3G HD/SD-SDI, Composite, Component, S-Video, HDMI), HDMI-HDMI, SDI-SDI Active Loop Through, Waveform, Vectorscope, Focus Assist, 등의 다양한 기능을 갖춰 업계 최고의 스펙과 기능을 자랑합니다. 또한 LVM-074W/SRM-074W-N은 LCD 패널의 온도를 측정하여 밝기와 색을 자동으로 조정하는 Temperature Adaptive Color 기능을 지원하여 출거나 더운 날씨로 인해 달라지는 LCD의 색 편차를 최소화시켜 줍니다.



Product Highlights

- 7" **1024 x 600 (16:9) Resolution**
- White LED Backlight
- 1:1 Pixel Mapping Modes for SD/HD
- 3G-SDI Level A/B
- Audio Level Meter Display
- Blue Only
- Focus Assist
- H/V Delay
- H/V Flip
- Luma(Y) Zone Check
- Marker
- Max Brightness On / Off
- Mono
- Range Error
- Temperature Adaptive Color
- Time Code Display
- User Aspect
- Various Scan modes
- Waveform/Vectorscope
- Zoom
- CC-608 ANC
- CC-608 LINE 21
- CC-708

Input

1 x HDMI	HDMI Input
3 x RCA	Analog Video Input
2 x BNC	SDI 2 Channel Input

Output

1 x BNC	SDI Channel Output (Active Loop Through) / HDMI-SDI (Conversion)
1 x HDMI	HDMI (Loop Through)

Input Signal

Analog	CVBS / S-Video / Component Video / RGB(D-TV)
3G-SDI	2.97Gbps
HD-SDI	1.485Gbps
SD-SDI	270Mbps
HDMI	1080p (24/25/30/50/60)/1080i(50/60)/720p(50/60)/480i(60)/480p(60)/576i(50)/576p(50)

Analog Input Spec

CVBS	1.0Vp-p (With Sync) NTSC. PAL
S-Video	1.0Vp-p (Y With Sync), 0.286/0.300 Vp-p(Chroma)
Component Video	1.0Vp-p (Y With Sync), ±350mV (Pb,Pr)

SDI Input Signal Formats

SMPTE-425M-A/B	1080p (60/59.94/50/30/29.97/25/24/23.98/30sF / 29.97sF/25sF/24sF/23.98sF) / 1080i (60/59.94/50)
SMPTE-274M	1080i (60/59.94/50) 1080p (30/29.97/25/24/24sF/23.98/23.98sF)
SMPTE-296M	720p (60/59.94/50)
SMPTE-260M	1035i (60/59.94)
SMPTE-125M	480i (59.94)
ITU-R BT.656	576i (50)

Audio IN	Embedded Audio / Analog stereo (Phone Jack)
Audio OUT	Analog stereo (Phone Jack) / Internal Speaker (Mixed Mono)
Power	DC 12V/1A (Max 2.0A)
Power Consumption (Approx.)	10Watts(Typ.)
Operating Temperature	0°C to 40°C (32°F to 104°F) / 0°C to 35°C (32°F to 95°F) (SRM-074W)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Accessory	AC Power Cord / DC Power Adaptor / Camera Mount Support / Stand

* 제품 사양은 사전 공지 없이 변경될 수 있습니다.

옵션 액세서리

